
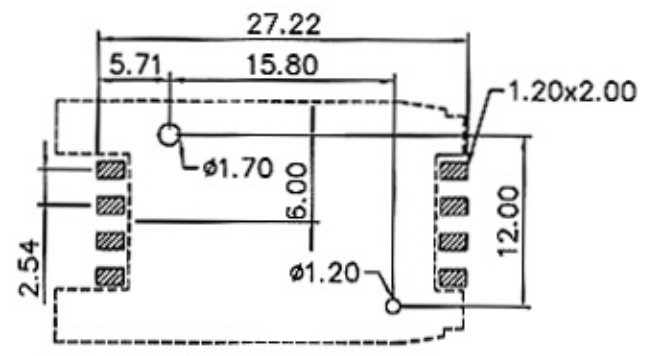


1 2 3 4 5 6 7 8

A

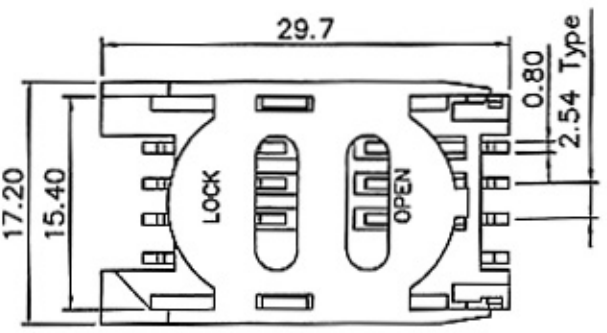

Recommended P.C.B Layout


SPECIFICATIONS:
 Current Rating : 0.5A Max.
 Dielectric Withstanding Voltage :
 500V AC R.M.S. For 1 Minute
 Insulation Resistance : 1000 Megohms Min.
 At DC 500V
 Contact Resistance : 30 Milliohms Max.
 Operating Temperature : -25°C To +85°C
 Max. Processing Temp.:
 230°C For 30~60 Seconds
 Durability : 5000 Cycles
 Housing : Hi.-Temp. Plastic(UL94V-0)
 Black
 Terminal : Phosphor Bronze,Gold
 Plating On Contact Area,Tin
 Plating On Solder Tail

B

B



C

C

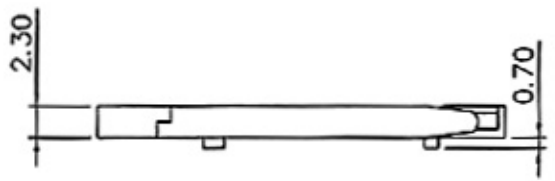

D

D

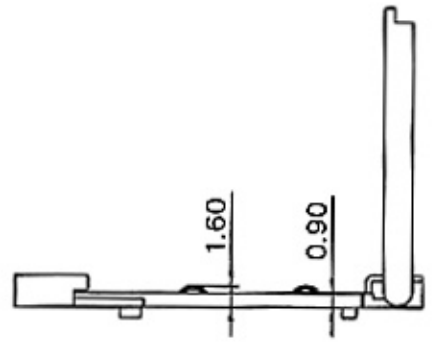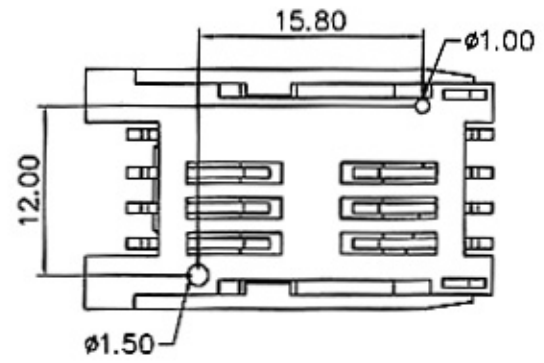

E

E

F

F

G

G

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		2:1	SIM CARD	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.5	C0612-08DAJB00	A

H

H

制表日:2002/12/04

DRAWING. APPROVED
Jane

1 2 3 4 5 6 7 8