

### SPECIFICATIONS




#### Electrical

Current Rating: 1A AC, DC  
 Voltage Rating: 125V AC/ max.  
 Operating Temp.: -20°C ~ +85°C  
 Insulation Resistance: 100mΩ/ min.  
 Dielectric Withstanding Voltage: 250V AC/ min.  
 Contact Resistance: 20mΩ/ max.

#### Material

Material: Nylon66, UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	1.25(0.049)	4.25(0.167)
3	2.50(0.098)	5.50(0.217)
4	3.75(0.148)	6.75(0.266)
5	5.00(0.197)	8.00(0.315)
6	6.25(0.246)	9.25(0.364)
7	7.50(0.295)	10.50(0.413)
8	8.75(0.344)	11.75(0.463)
9	10.00(0.394)	13.00(0.512)
10	11.25(0.443)	14.25(0.561)
11	12.50(0.492)	15.50(0.610)
12	13.75(0.541)	16.75(0.659)
13	15.00(0.591)	18.00(0.709)
14	16.25(0.640)	19.25(0.758)
15	17.50(0.689)	20.50(0.807)

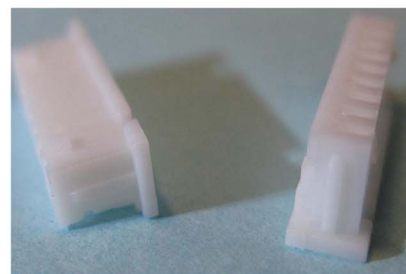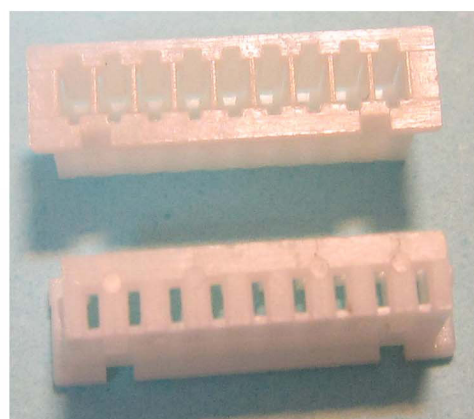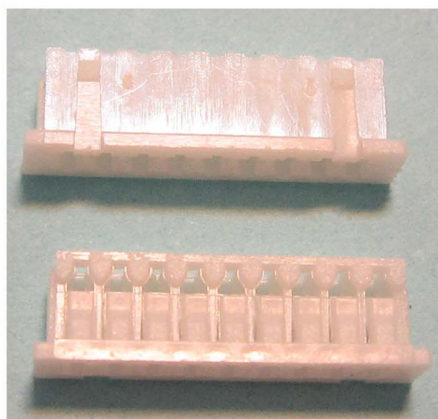

RoHS Compliant	<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Angel	SCALE 比例 参考	TOLERANCE 容許公差 0 ±0.15 .00 ±0.25 ANG. ±
DWG. 製圖 Yumi	UNIT 單位 M M	SIZE. 紙張尺寸 A 4
DATE 製表日 2008/08/20	PAGE 張數 1 OF 1	REV. 版次 A
PART NAME 品名 1.25mm HOUSING XXP WHITE COLOR ROHS LOW-LEAD		PART NO. 料號 H1025-XXPW0000R