


1 2 3 4 5 6 7 8

A

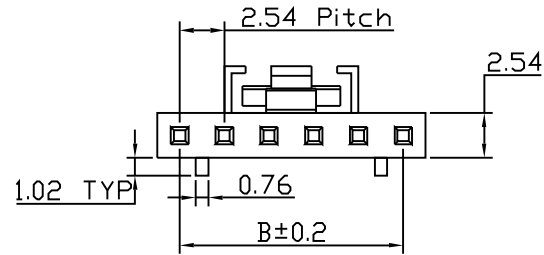



SPECIFICATION

Current Rating: 2.5A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25° C ~+85° C
 Contact Resistance: 20 mΩ Max.
 Insulation Resistance: 1,000M Ω Min.
 Withstanding Voltage: 1,000V AC/minute.
 Material: PBT, UL94V-0
 Color: Black

Circuit	Dimension	
	A	B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48
14	35.56	33.02
15	38.10	35.56
16	40.64	38.10
17	43.18	40.64
18	45.72	43.18
19	48.26	45.72
20	50.80	48.26
21	53.34	50.80
22	55.88	53.34
23	58.42	55.88
24	60.96	58.42
25	63.50	60.96

B

C

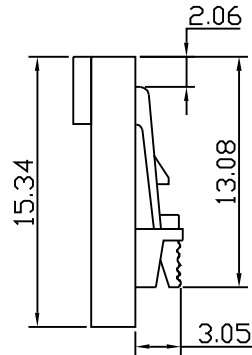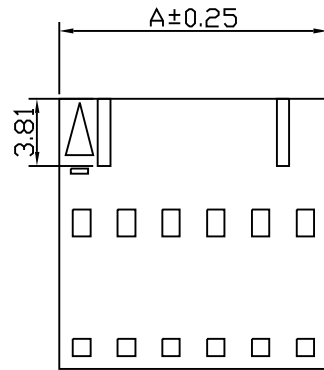

D

E

ORDER INFORMATION

H7066-

02-25 P: Non Distribution B: Black Fill It With "0" Fill It With "0" Fill It With "0" Fill It With "0"

F

G

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

2.5 : 1

CD-ROM 2.54mm HOUSING

H

制表日: 2002/12/04

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jane

± 0.3

H7066-XXPB0000

A

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H