







| | | |
|----------------------------|---|---|
| APPROVAL Electrical |  |  |
| Standard | UL | IEC |
| Rated voltage | 300V | 750V |
| Rated current | 30A | 26A |
| Wire range | 26-10AWG | 4.0mm ² |
| Withstanding voltage | AC3000V/1Min | |
| Menchanical | | |
| Torque | 0.5Nm(4.4Lb-In) | |
| Ambient temperature | -40°C ~ +105 °C | |
| Strip length | 8-9mm | |
| Dimensions | | |
| pitch | 9.52mm(.375") | |
| Poles | 2P,3P-24P | |
| Material | | |
| Housing | PA66,UL94V-0 | |
| Screws | M3,Steel, Cr ³⁺ Znplated | |
| Pin header | Copper, Tin-plated | |
| Cage | Brass,Ni-plated | |

HOW TO ORDER :

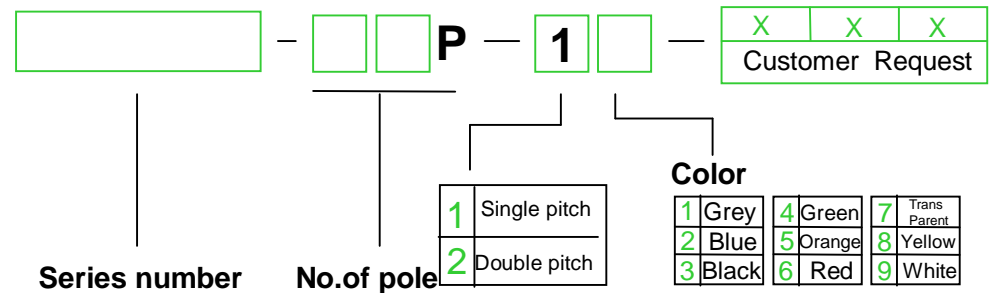

| | |
|---|---|
|  |  DEGSON ELECTRONICS CO., LTD. |
|  | NAME DG950-9.5 |