
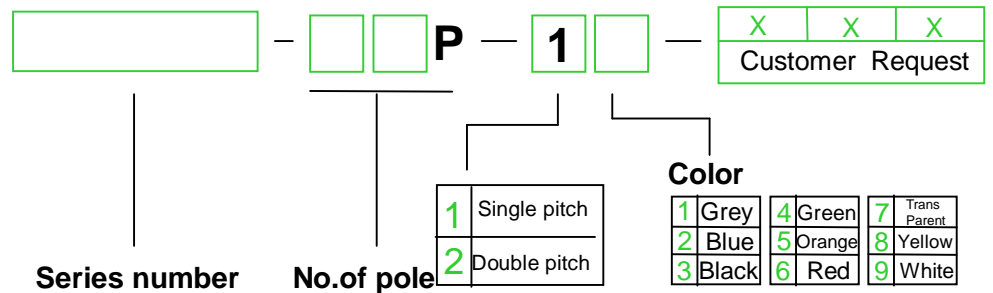





| | | |
|----------------------|---|--------------------|
| APPROVAL |  | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 630V |
| Rated current | 30A | 24A |
| Wire range | 26-10AWG | 4.0mm ² |
| Withstanding voltage | AC3000V/1Min | |
| Menchanical | | |
| Torque | 0.5Nm(4.4Lb-In) | |
| Ambient temperature | -40°C~+105 °C | |
| Strip length | 8mm | |
| Dimensions | | |
| pitch | 7.62mm(.300") | |
| Poles | 2P,3P-24P | |
| Material | | |
| Housing | PA66,UL94V-0 | |
| Screws | M3,Steel, Cr ³⁺ Znplated | |
| Pin header | Copper,Tin-plated | |
| Cage | Brass,Ni-plated | |

HOW TO ORDER :



| | |
|---|---|
|  mm (INCH) |  DEGSON ELECTRONICS CO., LTD. |
|  THROANGLE PROJECTION | NAME DG636-7.62 |