Connector

KLS electronic

USB Series

KLS1-182 USB-AM SOLDER TYPE


Material:

Housing: 30% Glass filled PBT UL94V-0 Contacts: Phosphor Bronze Pin Plated: Gold 3u" over 50u" nickel

Electrical Characteristics:

Current Rating: 1 AMP Insulator Resistance: 1000M Ohm min. at 500 VDC Dielectric Withstanding Voltage:500 VAC / Minute Contact Resistance: 30m Ohm max. Temperature: -55°C ~+105°C



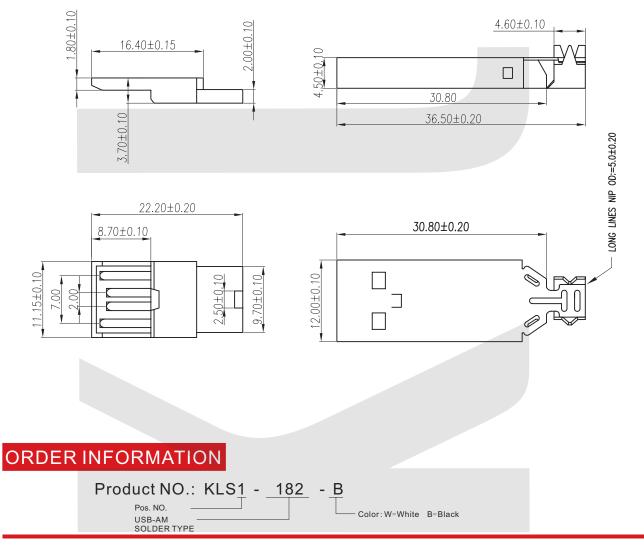

All specification & dimensions are subject to change, please call your nearest KLS sales represesntative for update information