



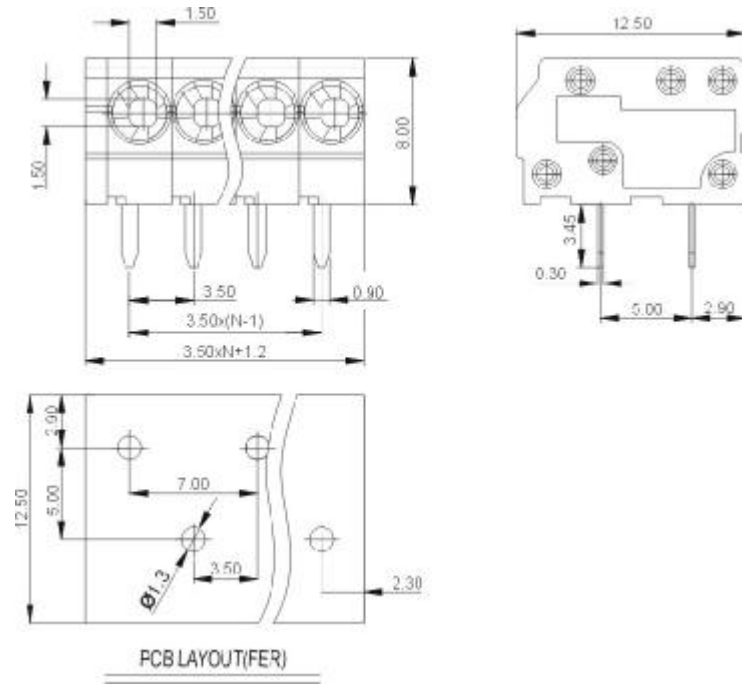


DEGSON ELECTRONICS CO., LTD.

Product Specification

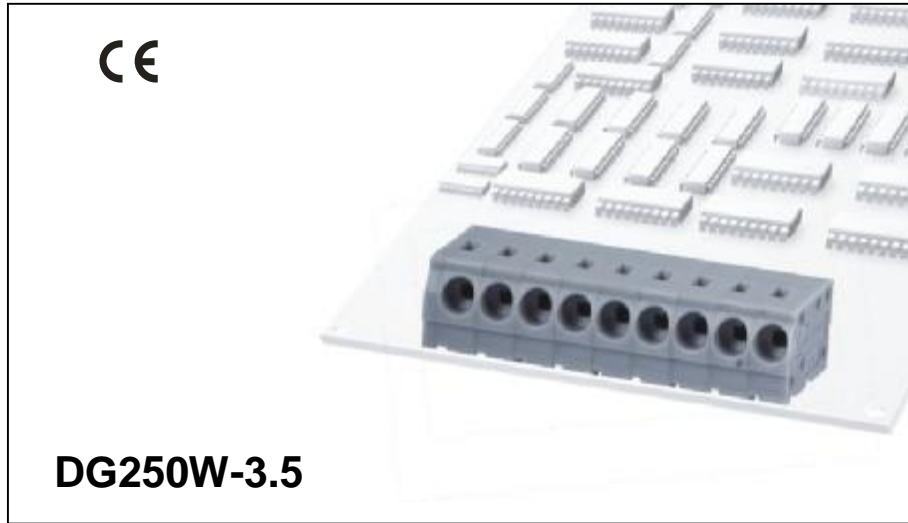

| | | |
|----------------------|-----------------------------|-------------------------|
| Approval | CE | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 400V |
| Rated current | 7A | 5A |
| Wire range | 22-18AWG | 0.2-0.75mm ² |
| Withstanding voltage | AC2500V/1Min | |
| Mechanical | | |
| Ambient temperature | -40°C ~ +105 °C | |
| Strip length | 8.5-9.5mm | |
| Dimensions | | |
| Pitch | 3.5mm (.138") | |
| Poles | 1P-XXP | |
| Material | | |
| Housing | PA66, UL94V-0 | |
| Pin header | Phosphor bronze, Tin plated | |

HOW TO ORDER :

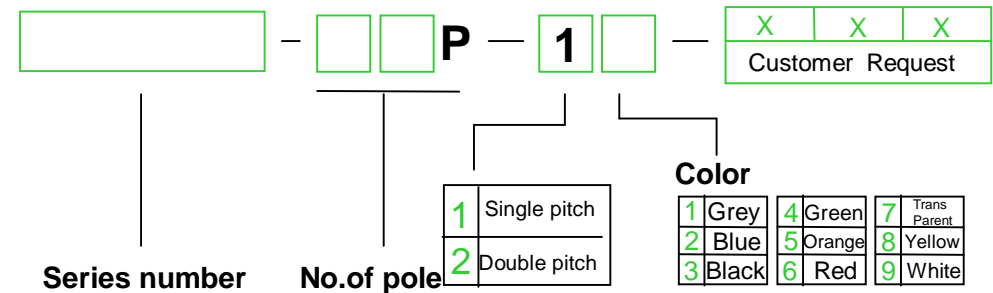

| | |
|----------------------|------------------------------|
| mm (INCH) | DEGSON ELECTRONICS CO., LTD. |
| THROANGLE PROJECTION | NAME DG250W-3.5 |