
Feature -

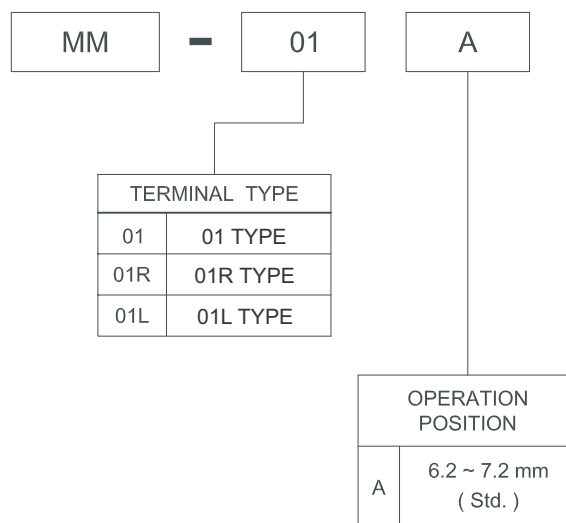
Small size
 180 and 90 angle terminal


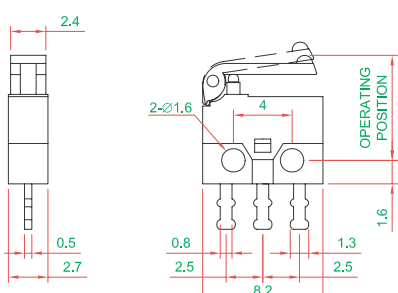


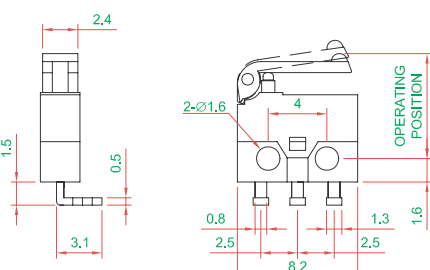


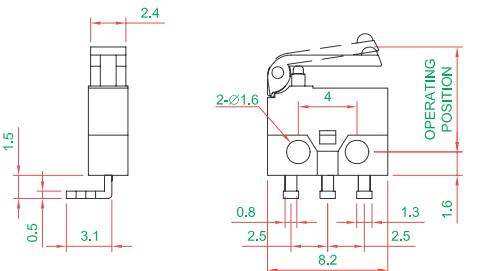


Applications -

Detection of position mode of mechanism
 Small rating power switch, auto car
 Slide of digital camera cover
 IC recorder, cassette recorder.

► SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	SPST
CONTACT RATING	30 V DC , 0.5 A
CONTACT RESISTANCE	100 mΩ max . 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ min . 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	50 gf max.
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C

► HOW TO ORDER


▶ DIMENSION	
<p>MM - 01 - A</p> 	 <p>SPDT</p>  <p>COM NO NC</p>
<p>MM - 01R - A</p> 	 <p>SPDT</p>  <p>COM NO NC</p>
<p>MM - 01L - A</p> 	 <p>SPDT</p>  <p>COM NO NC</p>
▶ P.C.B LAYOUT	▶ UNIT WEIGHT
	<ul style="list-style-type: none"> ■ COVER - POM ■ BASE FRAME - PBT ■ ACTUATOR - PBT ■ TERMINAL - SILVER PLATING
	▶ MATERIAL
	<ul style="list-style-type: none"> ■ MM - 01 : 0.25 ± 0.05 g / pcs ■ MM - 01L : 0.25 ± 0.05 g / pcs ■ MM - 01R : 0.25 ± 0.05 g / pcs