






Approval	CE	
Electrical	UL	IEC
Standard	600V	800V
Rated voltage	200A	200A
Rated current	20-3/0AWG	100mm ²
Wire range	AC3500V/1Min	
With standing voltage	5000M Ω /DC1000V	
Insulation Resistance		
Mechanical		
Max. Torque Value	6.8N.m 60.0Lb.in	
Ambient temperature	-40°C ~ +120°C	
Dimensions		
Pitch	36.0mm(1.417")	
Poles	1P-XXP	
Material		
Housing	PC, UL94V-0	
Terminal	Brass,5.0t Ni plated	
Screws	Steel,M10C ²⁺ Zn Plated	

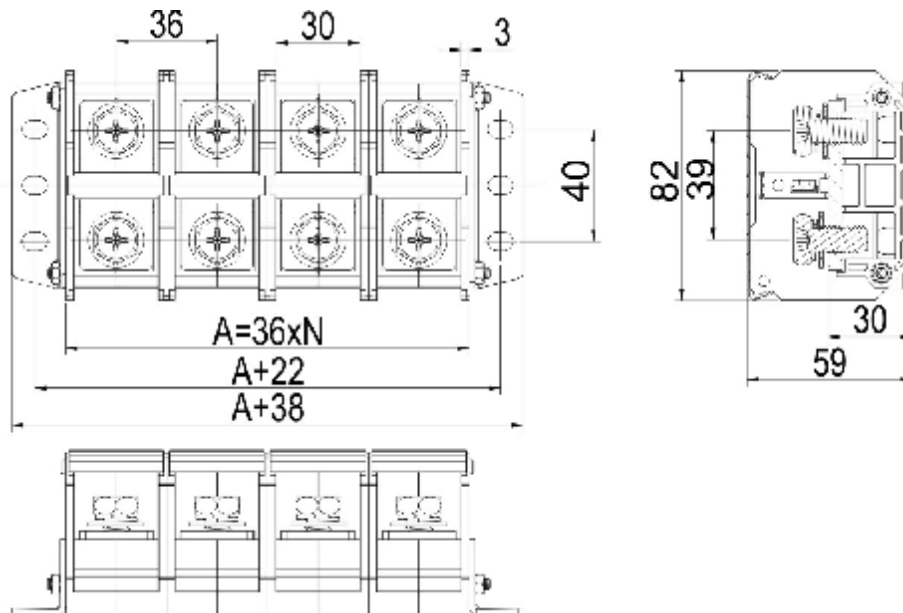

HOW TO ORDER :

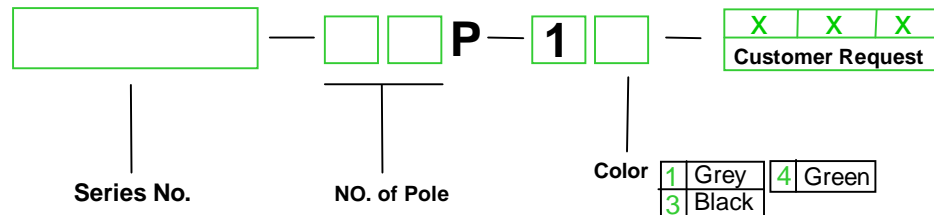

mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
THROANGLE PROJECTION	NAME DGR200