






DEGSON ELECTRONICS CO., LTD.

Product Specification




DG30-A

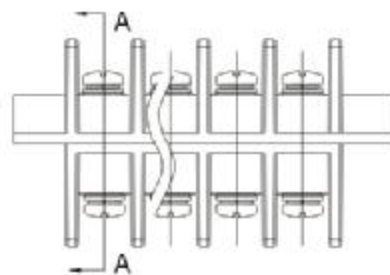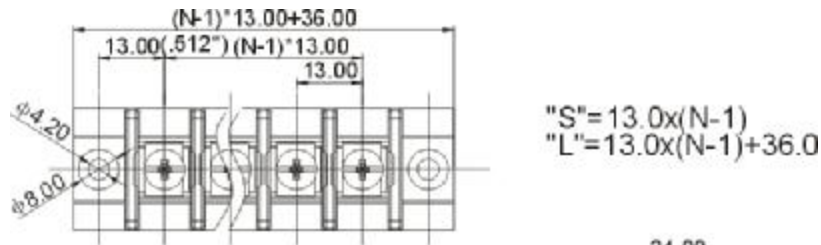

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	49.00	62.00	75.00	88.00	101.00	114.00	127.00	140.00	153.00					
S(mm)	13.00	26.00	39.00	52.00	65.00	78.00	91.00	104.00	117.00					

Approval	UL	IEC
Electrical		
Standard	UL	IEC
Rated voltage	300V	750V
Rated current	30A	41A
Wire range	28-10AWG	6.0mm ²
With standing voltage	AC3000V/1Min	
Insulation Resistance	500M Ω /DC500V	
Mechanical		
Max. Torque Value	0.8N.m 7.0Lb.in	
Ambient temperature	-40 $^{\circ}$ C ~ +105 $^{\circ}$ C	
Dimensions		
Pitch	13.0mm (.512")	
Poles	2P-10P	
Material		
Housing	PA66+23%GF, UL94V-0	
Terminal	Brass, 0.8t Tin plated	
Screws	Steel, M3.5 Ni plated	

HOW TO ORDER :

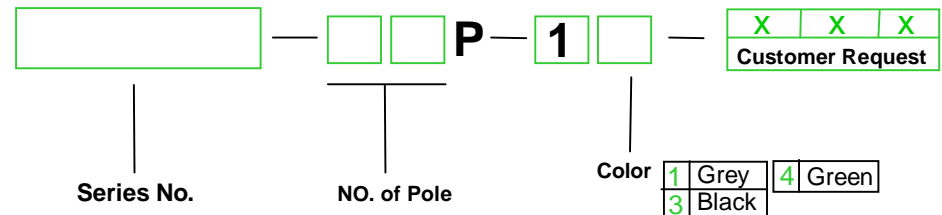

 	DEGSON ELECTRONICS CO., LTD.
NAME	DG30-A