




# DEGSON ELECTRONICS CO., LTD.

## Product Specification




<b>Approval</b>		
<b>Electrical</b>	<b>UL</b>	<b>IEC</b>
Standard	300V	450V
Rated voltage	15A	24A
Rated current	22-14AWG	2.5mm <sup>2</sup>
Wire range	AC2500V/1Min	
With standing voltage	500MΩ/DC500V	
Insulation Resistance		
<b>Mechanical</b>		
Max. Torque Value	0.8N.m 7.0Lb.in	
Ambient temperature	-40°C ~ +105°C	
<b>Dimensions</b>		
Pitch	9.52mm (.375")	
Poles	2*(5P-18P)	
<b>Material</b>		
Housing	PA66+23%GF, UL94V-0	
Terminal	Brass, 0.8t Tin plated	
Screws	Steel, M3.5 Ni plated	

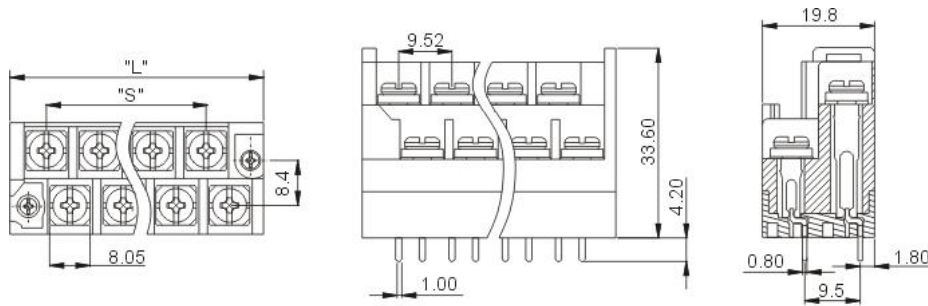

"S" = 9.52x(P/2-1)

"L" = 9.52x(P/2-1)+17.08

### HOW TO ORDER :

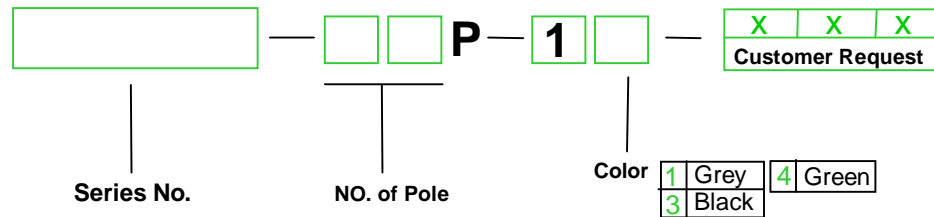

<b>Poles</b>	4	6	8	10	12	14	16	18	20	22	24	26	28	30
<b>L(mm)</b>	26.60	36.12	45.64	55.16	64.68	74.20	83.72	93.24	102.76	112.28	121.80	131.32	140.84	150.36
<b>S(mm)</b>	9.52	19.04	28.56	38.08	47.60	57.12	66.64	76.16	85.68	95.20	104.72	114.24	123.76	133.28
<b>Poles</b>	32	34	36	38	40	42	44	46	48					
<b>L(mm)</b>	159.88	169.40	178.92	188.44	197.96	207.48	217.00	226.52	236.04					
<b>S(mm)</b>	142.80	152.32	161.84	171.36	180.88	190.40	199.92	209.44	218.96					

	<b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>DG44B-1</b>