


SECTION:A-A
SCALE: 1:1
7.62 TYP

THE RECOMMENDED PCB LAYOUT
(TOLERANCE=±0.05mm)

- NOTES:
- General Characteristics
Mounting System:SMT
Durability:3,000 cycles min.
 - Material and Finish:
Insulation material:High Temperature Plastic (UL94V-0)
Contact material:Copper Alloy
Contact Finish:See Order Information Selectivity.
 - Electrical Characteristics
Number of contacts: 6 Position & 8 Position
Contact resistance:50 mΩ typical,100 mΩ max.
Insulation resistance:>1000 megaohms /500 VDC
Operation:Normally open.
 - Environmental Characteristics
Operating temperature:-40°C~+85°C
Operating humidity:10%~95%RH
Storage temperature:-40°C,+85°C
Storage humidity:10%~95%RH
Thermal shock: -40°C~+85°C, 5 cycles
Damp Heat:40°C,90%RH,10days
Salt-mist:35°C,5%,NaCl,24Hrs.

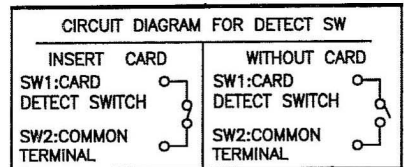

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

| | | | |
|------------|----------|----------------|---|
| APPD. 核准 | SCALE 比例 | TOLERANCE 容許公差 | PART NAME 品名 |
| DWG. 製圖 | UNIT 單位 | SIZE 紙張尺寸 | SIM CARD CONNECTOR PUSH-PUSH TYPE |
| DATE 制表日 | PAGE 張數 | REV. 版次 | H=1.8mm 6P SMT TYPE SELECTIVE GOLD 5U" PLATING WITH POST & WITH SWITCH BLACK COLOR ROHS |
| 2015/03/27 | 1 OF 1 | A | PART NO. C0647-06YEBX00R 料號 |

Betty